


## Rotary/mulch mower 1500

- Park Ranger 2150

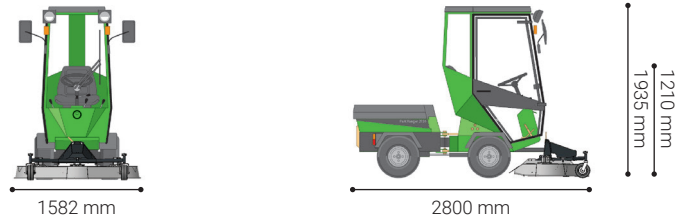

### Standard equipment:

- Hydraulic tipping function** Using the control handle, the cutter can be tipped into vertical position for easy cleaning and maintenance of the cutter.
- Hydraulic height adjustment** The cutting height is adjustable using the hydraulic system of the machine.
- Specially developed blades** The cutter is equipped with specially developed blades which ensure a nice result in shorter time and using less power.
- Support wheels** When the cutter is disassembled from the machine, it can be tipped to rest on two support wheels for easier transportation and storage.
- Piano wheels** Piano wheels which move the cutter in line with the manoeuvring are equipped with heavy slide bearings in their wheel forks for durability.

### Extra equipment (options):

- Large radiator cover** Choking of the radiator grille while mowing very dry grass in dusty surroundings can be avoided by mounting the large radiator cover.
- Mulch mower kit** The rotary mower can be changed into a mulch mower with a new set of blades and a cover placed inside the same mowing deck. Mulching creates fine trimmings, which supply the soil with natural nutrients and reduces the need of fertilisers.

### Technical specifications

Dimensions		
Length	mm	2800
Width	mm	1582
Height with / without cabin	mm	1935 / 1210
Storage dimensions		
Length	mm	990
Width	mm	1582
Height	mm	480
Weight		
Weight (rotary mower)	kg	127
Performance		
Ground clearance below mower	mm	95-115
No. of mower blades	pcs.	3
Cutting speed (tip speed)	m/sec.	77
Cutting width	mm	1500
Adjustable cutting height	mm	30-80
Theoretical mowing area - rotary	m <sup>2</sup> /h	15000
Theoretical mowing area - mulch	m <sup>2</sup> /h	13500
Max. recommended operating speed		
Rotary mower *	km/h	10
Mulch mower (shorter grass) *	km/h	9
* Depends on grass and height		
Noise level		
Noise level - outside LwA (2000/14/EC)	dB(A)	N/A
CE certified according to EU directive		

