


# Snow sweeper

## - City Ranger 2260

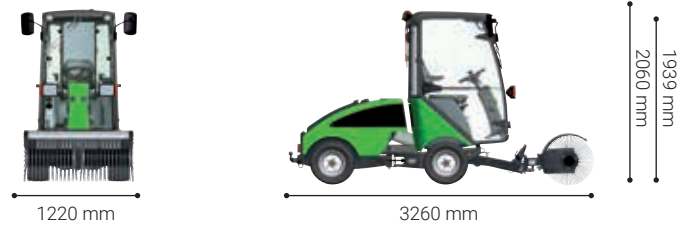

### Standard equipment:

- Trapeze mounting**      The trapeze-mounting ensures the snow sweeper remains clear of the wheels of the utility machine at all times, whatever the angle. The snow sweeper automatically turns with the utility machine - always sweeping in front of the wheels of the utility machine.
  
- Reverse rotation function**      Reversing the brush rotation ensures that the operator can sweep material when reversing out of an alley or parking spot, which ensures an excellent result.
  
- Adjustable speed**      The rotation speed can easily be adjusted from the cabin to match the need for sweeping.
  
- Support stand**      A support stand with a wheel is built in to the snow sweeper for easy storage.

### Extra equipment (options):

- Extended brush guard**      Attaching a brush guard extends the snow sweeper cover, which minimises the snow whirling up on the front wind-screen. Furthermore, the guard makes it easier to control the direction of swept sand and gravel during summer operation. This can be retrofitted on existing snow sweepers as well.

### Technical specifications

<b>Dimensions</b>		
Length	mm	3260
Width	mm	1220
Height with cabin / roll bar (ROPS)	mm	1939 / 2060
<b>Storage dimensions</b>		
Length	mm	820
Width	mm	1220
Height	mm	650
<b>Weight</b>		
Weight (snow sweeper)	kg	104
<b>Performance</b>		
Clearing width - straight	mm	1220
Clearing width - angled 25°	mm	1150
Ground clearance below brush	mm	420
Brush diameter Ø	mm	550
Operating speed	km/h	1-15
Theoretical sweeping capacity	m <sup>2</sup> /h	18300
Handling snow depth up to	mm	250
Brush speed	rpm	0-240
Turning angle		25°
<b>CE certified according to EU directive</b>		

