


Rotary/mulch mower 1500

- City Ranger 3070

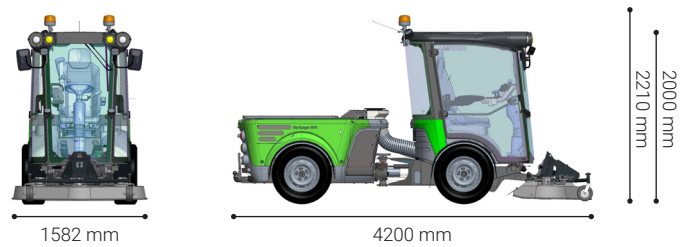

Standard equipment:

Hydraulic tipping function	Using the control handle, the cutter can be tipped into vertical position for easy cleaning and maintenance of the cutter.
Hydraulic height adjustment	The cutting height is adjustable using the hydraulic system of the machine.
Specially developed blades	The cutter is equipped with specially developed blades which ensure a nice result in shorter time and using less power.
Support wheels	When the cutter is disassembled from the machine, it can be tipped to rest on two support wheels for easier transportation and storage.
Piano wheels	Piano wheels which move the cutter in line with the manoeuvring are equipped with heavy slide bearings in their wheel forks for durability.
Reverse function	The machine provides the absolute best conditions for air supply and cooling by means of temporary air reversal through the cooling unit, which blows away any grass inside the intake grid.

Extra equipment (options):

Mulch mower kit	The rotary mower can be changed into a mulch mower with a new set of blades and a cover placed inside the same mowing deck. Mulching creates fine trimmings, which supply the soil with natural nutrients and reduces the need of fertilisers.
------------------------	--

Technical specifications

Dimensions		
Length	mm	4200
Width	mm	1582
Height / with beacon	mm	2000 / 2210
Storage dimensions		
Length	mm	990
Width	mm	1582
Height	mm	480
Weight		
Weight (rotary mower)	kg	137
Weight (mulch mower)	kg	145
Performance		
Ground clearance below mower	mm	140-190
No. of mower blades	pcs.	3
Cutting speed (tip speed)	m/sec.	77
Cutting width	mm	1500
Adjustable cutting height	mm	30-80
Theoretical mowing area - rotary	m ² /h	15000
Theoretical mowing area - mulch	m ² /h	13500
Max. recommended operating speed		
Rotary mower *	km/h	10
Mulch mower (shorter grass) *	km/h	9
* Depends on grass and height		
Noise level		
Noise level - outside LwA (2000/14/EC)	dB(A)	N/A
CE certified according to EU directive		