


Grass collector

- Park Ranger 2150

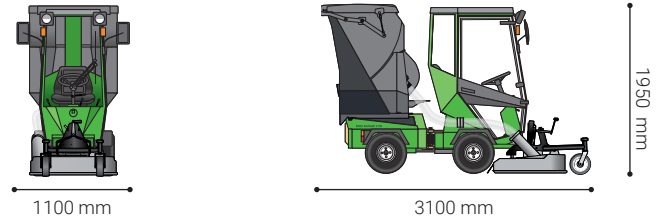

Standard equipment:

- Hydraulic tipping** Easy emptying of the hopper without leaving the cabin. Hydraulic tipping function and automatic lid opening. With a tipping height of 1800 mm it can be emptied directly into a container.
- Two-piece suction hose** The two-piece suction hose ensures easy access in case of clogging.
- Air intake** A special air intake on both sides of the hopper protects the engine of the utility machine against grass dust.
- Safety valve** A safety valve makes sure to stop both turbine and rotary mower while the hopper is being emptied.
- Stand** A stand for easy and quick attaching/detaching of the hopper is standard equipment.

Extra equipment (options):

- Mulch and rotary mower kits** You can quickly convert the grass collector to a non-collecting mulch mower or standard rotary mower with the help of special kits available.
- Leaf suction unit** The grass collector can also be combined with the leaf suction unit for easy collection of leaves.

Technical specifications

Dimensions

Length (with mower 1000)	mm	3100
Width (with mower 1000)	mm	1100
Height with cabin	mm	1950

Storage dimensions

Length	mm	1700
Width	mm	1050
Height	mm	2000

Weights

Weight with / without cabin ¹⁾	kg	995 / 885
Payload with / without cabin	kg	305 / 415
Weight (grass collector)	kg	170
Weight (frame)	kg	31

Hopper (grass collector)

Hopper volume	l	470
Hopper load, max.	kg	120
Tipping level from ground, with high tipping	mm	1800

Performance

Airflow	m ³ /h	1500
Airspeed	km/h	70
Max. recommended operating speed	km/h	8-10

Noise level

Noise level - outside LwA (2000/14/EC)	dB(A)	105
--	-------	-----

CE certified according to EU directive

¹⁾ Includes: grass collector, mower 1000, 75 kg driver and 90% fuel capacity

